



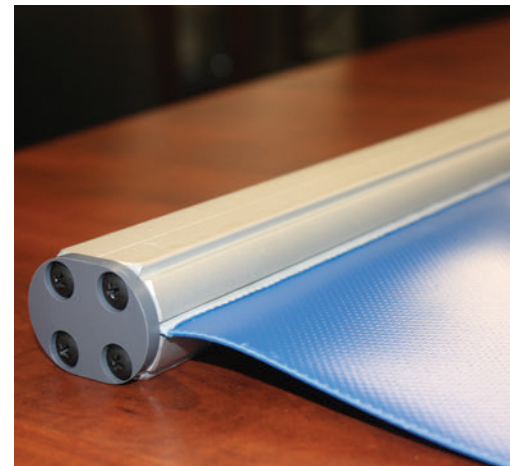
SPEED-MASTER® 1600 XL¹⁹

High Performance Door

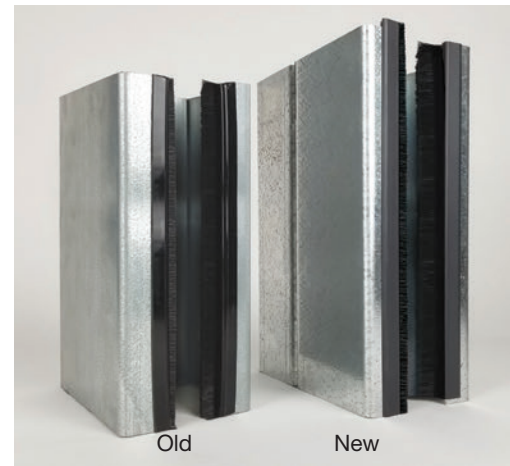
HÖRMANN

Features

Application	Interior or exterior
Model / Classification	1600 XL¹⁹ / Fabric
Size range	Maximum 20'0" w X 20'0" h
Technology	Direct-drive, sectional panel
Operating speed	Opening 48" IPS Closing 30" IPS
Panel	Patented, sectional design, heavy-duty aluminum hinge profiles Panel: reinforced, puncture resistant 58 oz. PVC material Colors: orange, blue, yellow, red, gray and white
Thermal insulation	U-value (metric) in W/(m ² ·K) U-value (imperial) in BTU/(h·ft ² ·°F)
Vision	Two full-width, clear PVC starting approximately 36" off floor
Custom panel imprints	Logos, photos or text digitally printed onto panel. UV treated and waterproof. Maximum image size 7'0" wide X 3'0" high
Resistance to wind load	Consult factory
Guide tracks	12 ga. galvanized steel 7-3/8" wide X 4-3/8" projection Optional: Windlocks
Hoods	Optional: Galvanized steel or stainless steel
Safety	8'0" high light curtain built into guide tracks
Control	Smart Start™ NXT NEMA 4X UL 208 to 575 v / 3-phase / 60 Hz voltage input Optional: Step-up transformer Optional: Smart Start™ NXT NEMA 4X UL 1-phase available Smart Start™ NXT HFCB NEMA 3 Non-UL 1-phase consult factory
Activation options	Push button / Pull cord / Motion detector / Presence detector Induction loop detector (wire/sealant by others) / Remote control Touchless switch (several models) Consult factory for additional options
Accessories	LED Lite-Advance / ScanProtect / Wireless Crash Alert / Remote Keypad / Energy Analysis Report
Emergency	Chain hoist Optional: Hand crank Optional: UPS emergency battery pack Non-UL (With HFCB 1-phase control box only)
Compliance	Door complies with requirements of UL325
Warranty	5 & 2 Year: Motor/gearbox (excluding catch) and panel material 5 years, materials & workmanship. All other mechanical and electrical components free from defects, 2 years

**Sectional panel with aluminum windbar for panel stability**

An aluminum bottom bar with breakaway tabs breaks out of the guide tracks if accidental impact occurs. Panel windlocks are optional for added wind pressure resistance. (Windlocks disable the breakaway function.)

**Two piece guide tracks**

Heavy-duty two-piece guide tracks with brush seal fit into any application. Overall dimensions: 7-3/8" wide X 4-3/8" projection.

USA

Toll Free: 800.365.3667
Email: info2@hormann.us
Website: hormann.us

Canada

Toll Free: 866.792.9968
Email: info@hormann.ca
Website: hormann.ca

